


# PYROLYTIC GRAPHITE FOIL TFO-Y-PG

highly anisotropic conductive



TFO-Y-PG consists of pure pyrolytic graphite. Due to the synthetic structure it shows highly anisotropic heat spreading conductivities in-plane (x-y-plane) and in through direction (z-direction). Its softness allows for a good compliance to the contact surfaces. Thus the total thermal resistance is minimised. Their low densities make them ideal for applications where low weight is required. The very high temperature resistance allows for the use in extreme hot environments. Due to its flexibility it is bending-resistant. It can be used for curved surfaces and corners because its thermal conductivity will remain unchanged in the absence of sharp folds. Special configurations are dielectric with insulating films or laminated on flexible gap filler elastomers.

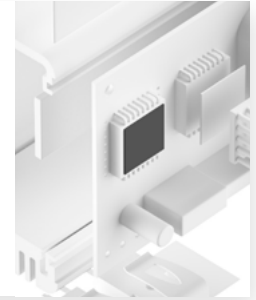

Release 02 / 2024

### PROPERTIES

- Maximum contact through good surface compliance
- Very low weight
- Silicone-free
- Very high temperature resistance
- EMI-shielding through high electrical conductivity
- UL V0

### AVAILABILITY

- Sheet 180 x 230 mm
- Sheet 115 x 180 mm (Adhesive construction)
- Non adhesive (TFO-YXXX-PG)
- Adhesive (TFO-YXXX-PG-A1)
- Die cut parts

### APPLICATION EXAMPLES


- Thermal link of:
- CPUs to heat sinks
  - Laser diodes
  - TEC modules
- For use in high end computers / Analyzers / Photonics

Technical Data Sheet

PROPERTY	UNIT	TFO-Y070-PG	TFO-Y100-PG
<b>MATERIAL</b>			
Colour		Grey	Grey
Thickness	mm	0.07 ±0.015	0.10 ±0.030
Density	g/cm <sup>3</sup>	1.21	0.85
UL Flammability	UL 94	V0	V0
RoHS Conformity	2015 / 863 / EU	Yes	Yes
<b>THERMAL</b>			
Resistance <sup>1</sup> @ 150 PSI	°C-inch <sup>2</sup> /W	0.04	0,045
Resistance <sup>1</sup> @ 30 PSI	°C-inch <sup>2</sup> /W	0.07	0,078
Resistance <sup>1</sup> @ 10 PSI	°C-inch <sup>2</sup> /W	0.09	0,10
Thermal Conductivity (Z Direction)	W/mK	20	25
Thermal Conductivity (X-Y Direction)	W/mK	1,000	700
Operating Temperature Range	°C	- 250 to + 400	- 250 to + 400
<b>ELECTRICAL</b>			
Electrical Conductivity	S/cm	10,000	10,000

Measurement technique according to: 'ASTM D 5470. All data without warranty and subject to change. Please contact us for further data and information. Shelf life adhesive: 6 months when stored in original packaging at room temperature and 50% relative humidity.

Thicknesses: 0.07 mm / 0.10 mm

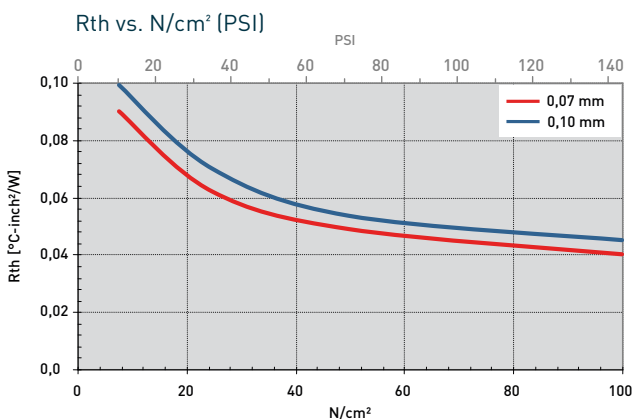

All technical data and information are without warranty and believed to be reliable and accurate, corresponding to the latest state of the art. Since the products are not provided to conform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.