


SILICONE GAP FILLER PAD TEL-Z-SI

highly thermally conductive elastomer / Low Volatile Siloxanes (LV)

TEL-Z-SI is a non dielectric high performance thermally conductive LV silicone foil for an optimised thermal coupling between electronic packages and heat sinks even over large gaps or big tolerances. Through the specific formulation and filling an extraordinary high anisotropic thermal conductivity is reached. Its conformal surface structure and high softness guarantee a very good compliance to the contact surfaces at low pressure. Thus the total thermal resistance is minimised.



Release 09 / 2026

PROPERTIES

- ☐ High surface compliance and softness
- ☐ Low volatile siloxane content (LV)
- ☐ Non dielectric
- ☐ No paint wetting impairment
- ☐ Thermal conductivity: 50 W/mK (anisotropic)
- ☐ Extraordinary chemical resistance and longterm stability
- ☐ Shock absorbing

AVAILABILITY

- ☐ Sheet 140 x 140 mm (TEL-ZXXXX-SI)
- ☐ Die cut parts
- ☐ Optional with adhesive stripes or dots (TEL-ZXXXX-SI-A1)

APPLICATION EXAMPLES

Thermal link of:

- ☐ MOSFETs or IGBTs
- ☐ Power diodes or AC/DC converters
- ☐ Power modules

For use in Switch mode power supplies / Motor control units / Automotive engine management systems / UPS units / Solar systems

Technical Data Sheet



PROPERTY	UNIT	TEL-Z0200-SI	TEL-Z0500-SI	TEL-Z1000-SI
MATERIAL				
Colour		Graphite filled silicone elastomere	Graphite filled silicone elastomere	Graphite filled silicone elastomere
Thickness	mm	Black	Black	Black
Hardness	Shore 00	0.2 ±0.05	0.5 ±0.05	1.0 ±0.10
No Paint Wetting Impairment Substances (PWIS) ¹		75	75	75
Flammability	UL 94	Passed	Passed	Passed
RoHS Conformity	2015 / 863 / EU	V0	V0	V0
Yes		Yes	Yes	Yes
THERMAL				
Resistance ² @ 90 PSI @ Thickness	°C-inch ² /W (mm)	0.020 (0.16)	0.060 (0.33)	0.09 (0.70)
Resistance ² @ 30 PSI @ Thickness	°C-inch ² /W (mm)	0.027 (0.18)	0.075 (0.48)	0.11 (0.91)
Resistance ² @ 10 PSI @ Thickness	°C-inch ² /W (mm)	0.050 (0.19)	0.095 (0.49)	0.13 (0.97)
Thermal Conductivity	W/mK	50	50	50
Operating Temperature Range	°C	- 50 to + 180	- 50 to + 180	- 50 to + 180
ELECTRICAL				
Volume Resistivity	Ohm - cm	< 50,000	< 50,000	< 50,000

Measurement technique according to: ¹P-VW 3-10.7 57650 Temp. Test, ²ASTM D 5470. Typical, non-binding values. Not intended for specification purposes. Subject to technical changes. Please contact us for further information.

Shelf life adhesive: 6 months when stored in original packaging at room temperature and 50% relative humidity.

Thicknesses: 0.2 mm / 0.4 mm / 0.5 mm / 1.0 mm / 1.5 mm / 2.0 mm

mm vs. N/cm² (PSI) / Rth vs. N/cm² (PSI)

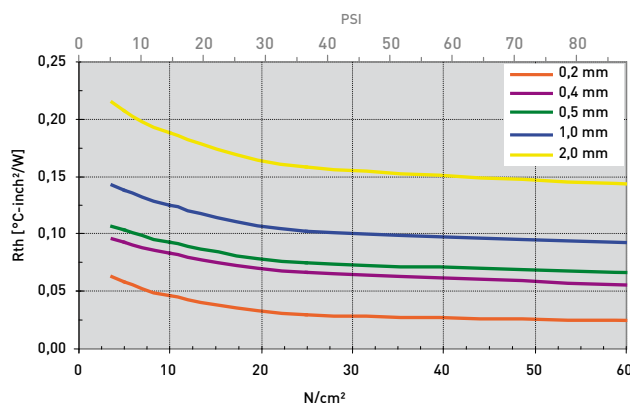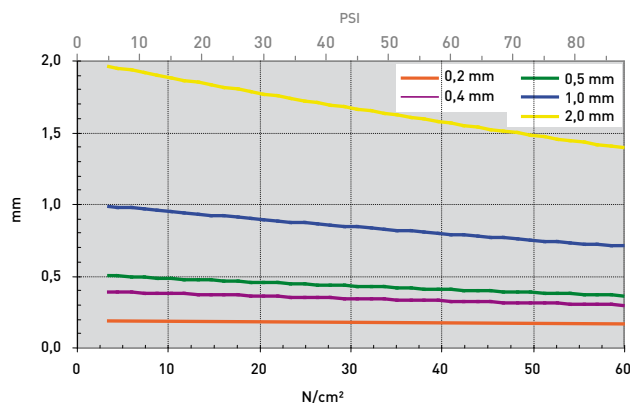

All technical data and information are without warranty and believed to be reliable and accurate, corresponding to the latest state of the art. Since the products are not provided to conform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.