

SILICONE GAP FILLER PAD TGF-M-SI

soft, flexible

TGF-M-SI is an electrically insulating thermally conductive silicone gap filler. It is ideal for use in applications where thermal transfer over large gaps caused e.g. by big tolerances or different stack up heights must be achieved. Due to the specific formulation and filling with ceramic particles the silicone elastomer has a very high thermal conductivity. Through its high softness and flexibility the material perfectly mates to irregular surfaces thus filling gaps at low pressure. By its use the total thermal resistance is minimised. The natural tackiness of the material allows for an easy and reliable pre-assembly.



Release 09 / 2026

PROPERTIES

- ☐ Soft and compliant
- ☐ Thermal conductivity: 2.5 W/mK
- ☐ Operates at low pressure
- ☐ Extraordinary chemical resistance and longterm stability
- ☐ Shock absorbing
- ☐ Easy mounting through self tackiness
- ☐ One or two-side self-tacky

AVAILABILITY

- ☐ Sheet 480 x 460 mm (Thickness 0.5 / 1.0 mm)
- ☐ Sheet 460 x 460 mm (Thickness 2.0 mm)
- ☐ Sheet 450 x 460 mm (Thickness ≥ 2.5 mm)
- ☐ Tacky on both sides (TGF-MXXXX-SI)
- ☐ Tacky on one side (TGF-MXXXX-SI-A1)
- ☐ Die cut parts
- ☐ Kiss cut parts on sheet

APPLICATION EXAMPLES

- Thermal link of:
- ☐ SMD packages
 - ☐ Through-hole vias
 - ☐ Capacitors
 - ☐ Electronic parts to heat pipes
- For use in Automotive applications / Laptops / Medicine engineering/ Industrial PCs



Technical Data Sheet

PROPERTY	UNIT	TGF-M0500-SI	TGF-M1000-SI	TGF-M2000-SI	TGF-M3000-SI
MATERIAL		Ceramic filled silicone	Ceramic filled silicone	Ceramic filled silicone	Ceramic filled silicone
Colour		Light blue	Light blue	Light blue	Light blue
Thickness	mm	0.5 ± 0.05	1.0 ± 0.10	2.0 ± 0.20	3.0 ± 0.30
Hardness	Shore 00	50	50	50	50
UL Flammability	UL 94	V0	V0	V0	V0
RoHS Conformity	2015 / 863 / EU	Yes	Yes	Yes	Yes
THERMAL					
Resistance ¹ @ 60 PSI @ Thickness	°C-inch ² /W (mm)	0.27 (0.38)	0.45 (0.71)	0.75 (1.31)	0.96 (1.76)
Resistance ¹ @ 30 PSI @ Thickness	°C-inch ² /W (mm)	0.29 (0.42)	0.50 (0.80)	0.84 (1.50)	1.09 (2.07)
Resistance ¹ @ 10 PSI @ Thickness	°C-inch ² /W (mm)	0.32 (0.45)	0.55 (0.90)	0.95 (1.75)	1.26 (2.46)
Thermal Conductivity ¹	W/mK	2.5	2.5	2.5	2.5
Operating Temperature Range	°C	- 60 to + 180	- 60 to + 180	- 60 to + 180	- 60 to + 180
ELECTRICALLY					
Dielectric Strength	kV / mm	10	10	10	10
Volume Resistivity	Ohm - cm	1.0×10^{11}	1.0×10^{11}	1.0×10^{11}	1.0×10^{11}
Dielectric Constant	@ 1 kHz	5.2	5.2	5.2	5.2

Measurement technique according to: 'ASTM D 5470. Typical, non-binding values. Not intended for specification purposes. Subject to technical changes. Please contact us for further information.

Thicknesses: 0.5 mm / 1.0 mm / 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm

mm vs. N/cm² (PSI) / Rth vs. N/cm² (PSI)

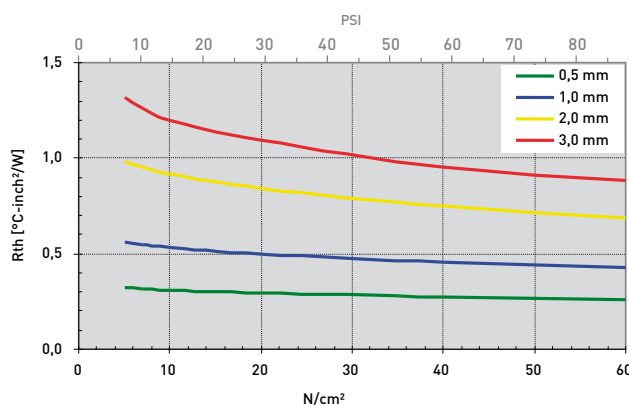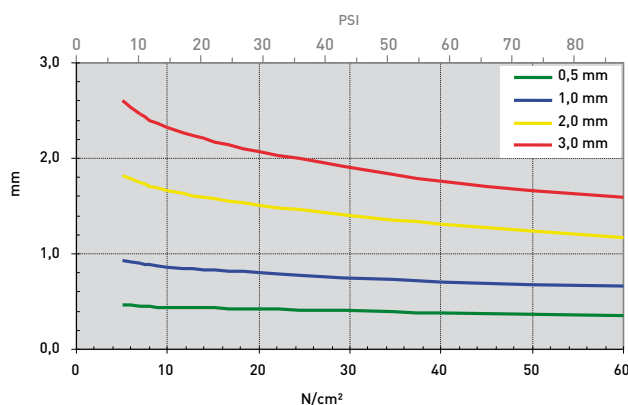

All technical data and information are without warranty and believed to be reliable and accurate, corresponding to the latest state of the art. Since the products are not provided to conform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.